

866.332.2403 (TOLL FREE); 7am – 7pm Pacific Time, Monday-Saturday

ASSEMBLY INSTRUCTIONS FOR THE CHAIR SWING SETS



	No.	1	71	3	4	5	9	7
CONTENT OF BOXES - Frame Swing	Drawing							
	Description	Posts	Legs	Supports	Diagonal Supports	Roof Supports If ordered	Roof Frame If ordered	Roof Board If ordered
	Qty.	2	2	1	4	4	2	1

Note: Part numbers in the Content of Boxes Table are for reference only. These do not match to the numbers marked on the parts sent.


	No.	&	6	10
CONTENT OF BOXES – Chair Swing	Drawing			
	Description	Seat	Backrest	Armrest
	Qty.	1	1	2

Note: Part numbers in the Content of Boxes Table are for reference only. These do not match to the numbers marked on the parts sent.

Note: Dimensions of your hardware will vary depending on size.


Š 10 0 9 ∞ 6 Diagonal Supports DESCRIPTION Roof Supports Roof Frame Roof Board Supports Backrest Armrest Posts Legs Seat

Note: Part numbers in the <u>Drawing</u> are for reference only. These do not match to the numbers marked on the parts sent.

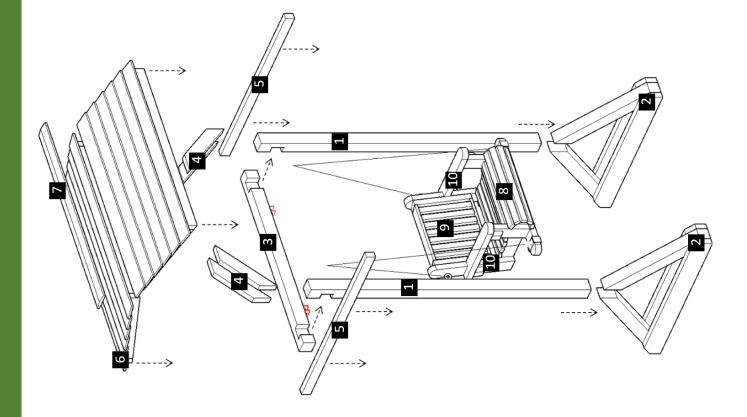


Option A – Without Swing Roof


Step 1: Attach the post (1) to the legs (2) with 3/8" x 7" bolts (A) and 3/8" x 11" bolts (B). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

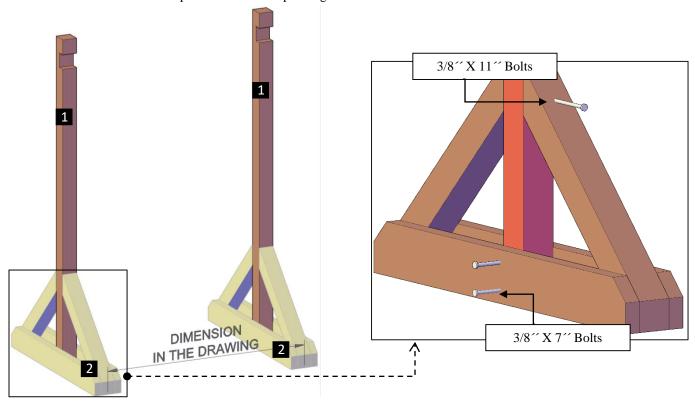


Step 2: Put the Quick Links (J) and the Springs (K) in the hanger's support. After that, put the chains (L). Take a few minutes to adjust the chain height to your preference.

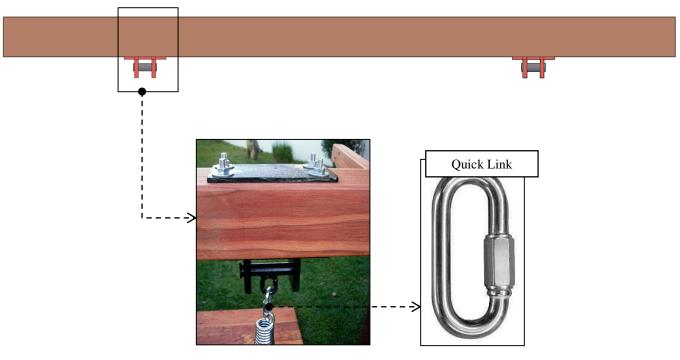

Step 3: Use 5/16" x $3\frac{1}{2}$ " bolts (C) to attach support (3) to the posts. Each part has a series of numbers that indicate where to attach the part with the corresponding number.

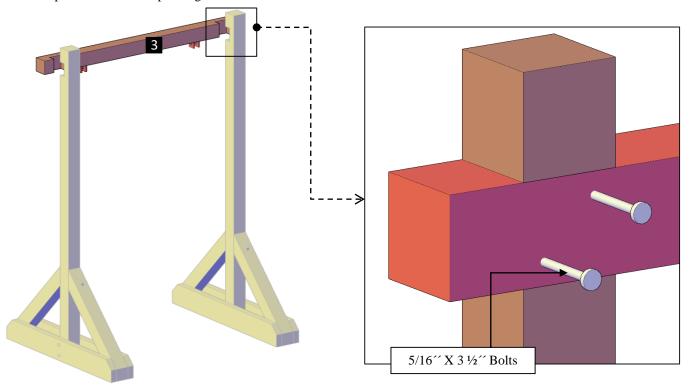


Step 4: Attach the diagonal supports (**4**) to the posts and to the support with 3/8" x 8" bolts (**D**). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

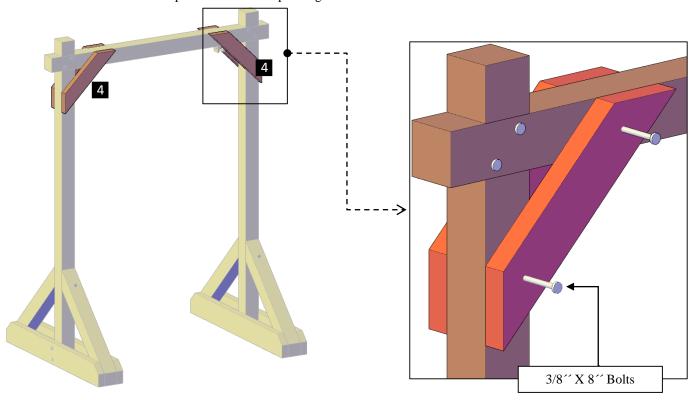


Note: If your Swing Set doesn't include roof, then go to step 8.

Option B - With Swing Roof


Step 5: Attach the roof supports (5) to the posts with 5/16" x 5 $\frac{1}{2}$ " bolts (E). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

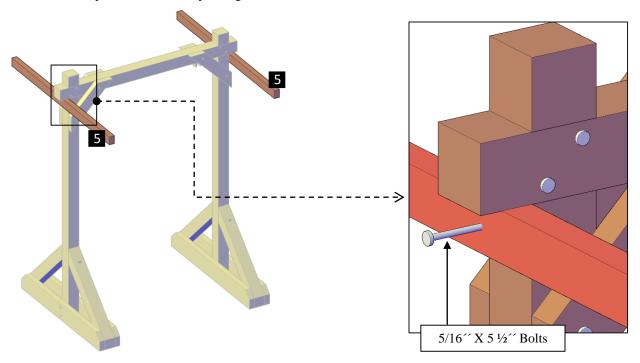


Step 6: Attach the roof panels (6) to the roof supports with 5/16 'x 4' bolts (**F**) and to the diagonal supports with 3' deck screws (**G**). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

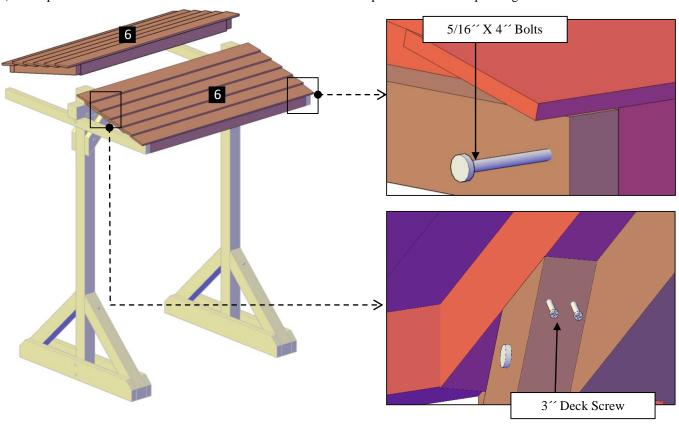


Step 7: Use 2" deck screws **(H)** to attach the roof board **(7)** to the posts. Each part has a series of numbers that indicate where to attach the part with the corresponding number.

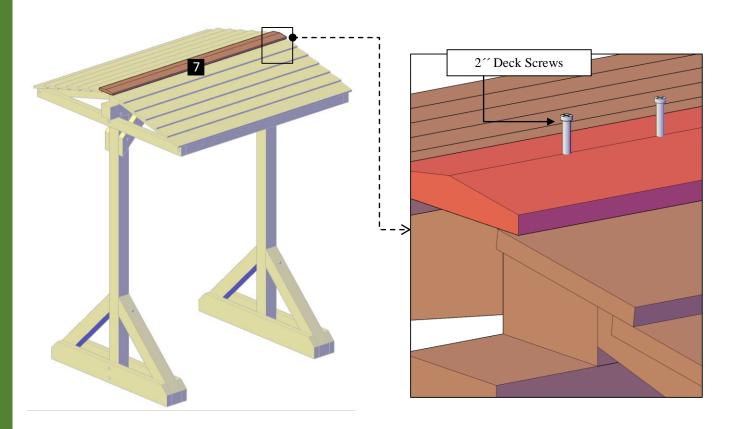


Step 8: Attach the seat (8) to the armrest (10) with $5/16^{"}$ x $3\frac{1}{2}^{"}$ bolts (C). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

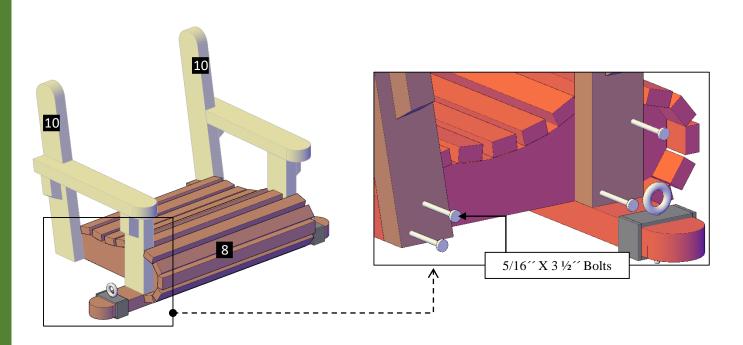

Step 9: Attach the backrest **(9)** to the armrest **(10)** with 5/16 "x 3 1/2" bolts **(C)** and 3/8" x 4" eyebolts **(I)**. Each part has a series of numbers that indicate where to attach the part with the corresponding number.

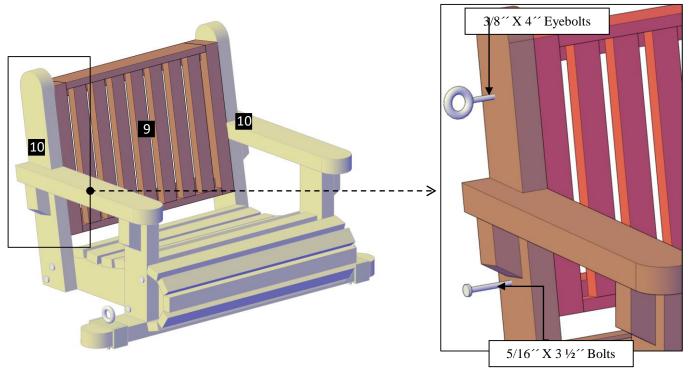

Step 9: Finally, use quick links (J) to joining the chair swing to the chains (L).

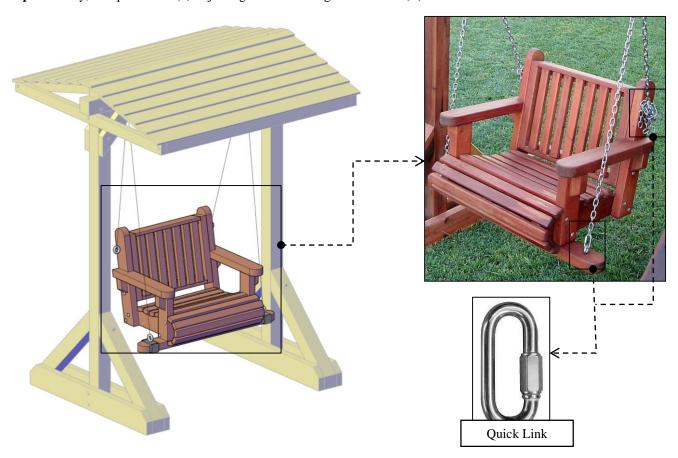

Option A – Without Swing Roof



Option B – With Swing Roof





This completes the Swing assembly. Hope you enjoy your set for many decades. If you ever have a problem or a question, don't hesitate to call us (866 332 2403) or email us. We are here to support you.