

---

866.332.2403; Outside the US: 619.600.5630 7am-7pm Pacific Time, Monday-Saturday

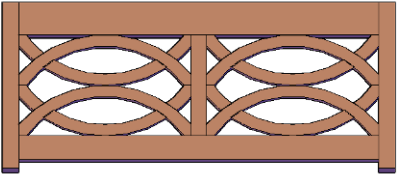
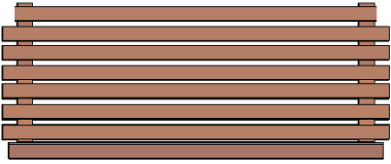



## Assembly Instructions for: **HENNELL BENCHES**



Thank you for purchasing Forever Redwood patio furniture. Forever Redwood is built by Old-Growth Again Restoration Forestry (OGA). OGA is dedicated to restoration forestry. Sales of patio furniture finance our restoration work in California redwood forestlands.

**Tools required:** ½-inch ratchet and a mallet or small hammer.

**Content of boxes**

Quantity	Description	Drawing
1	Backrest	
1	Seat	
2	Sides	
2	Diagonal Supports	
1	Front Brace	
10	Carriage Bolts 3 ½" x 5/16", Washer & Nuts	
4	Carriage Bolts 4 ½" x 5/16", Washer & Nuts	

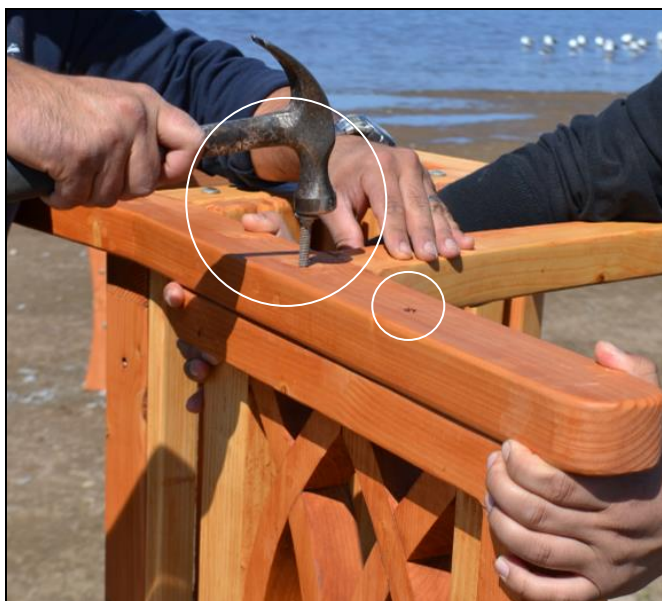
The parts that go together have the same numbers written next to the predrilled holes they attach to. Align the parts with the numbers as shown for ease of reference





**Step 1:** Attach sides to bench seat. Match up the numbers to each corresponding side. The legs are not interchangeable from side to side. Align the predrilled holes, tap both bolts (3 1/2" x 5/16") all the way in to set it into the wood and then add a washer and tighten the nut. Make sure you are attaching the correct side – if the bolts do not lined up; just move the leg over to the other side of the bench seat. The bolts should tap into their hole. If you are using force, the leg probably belongs on the other end of the bench seat. Do not over tighten the bolts or you'll crush through the redwood and weaken the bench.



**Step 2:** Attach backrest to legs with 2 bolts (3 1/2" x 5/16"), washer & nut per side. Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.



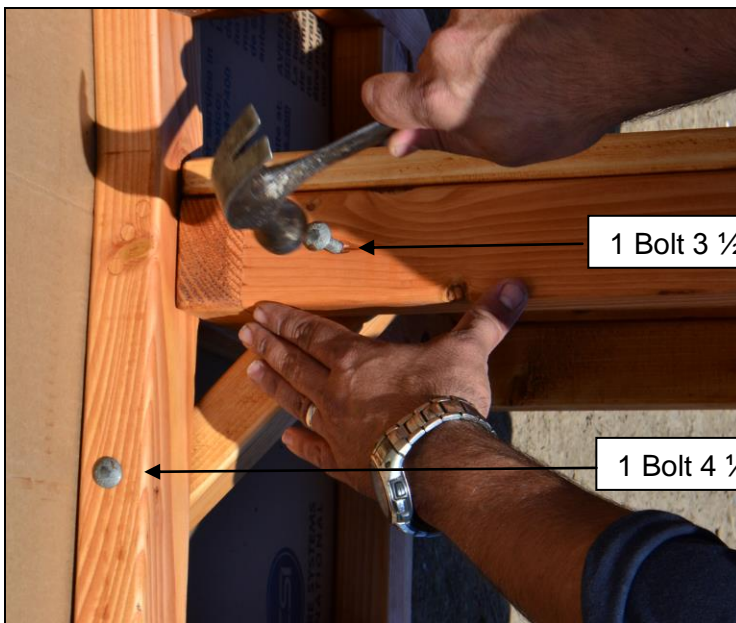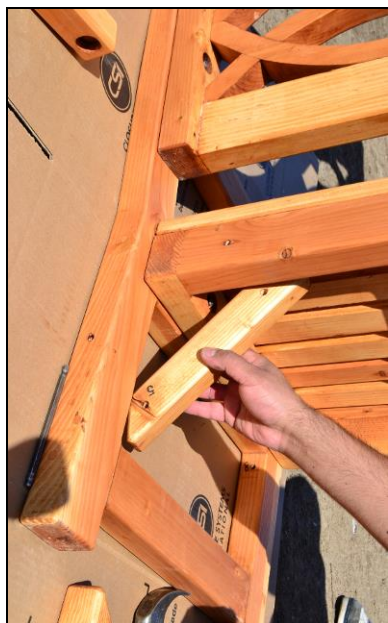**Step 3:** Attach the diagonal support to the leg and underside of bench seat with two bolts. The holes have already been drilled. Use a 4 ½" x 5/16 bolt to attach the diagonal support to leg and a 3 ½" x 5/16" bolt to attach to bench seat.



**Step 4:** Attach long support to front legs with one bolt (4 ½" x 5/16"), washer & nut per side.



Thank you! If you have any questions, please call or email us.