
866.332.2403 (Toll Free); 7am-7pm Pacific Time, Monday-Saturday

Assembly instructions for: **LIGHTHOUSE SHOWER BENCHES**




CONTENT OF THE BOXES



The parts that go together have the same numbers written next to the predrilled holes they attach to. Align the parts with the numbers as shown for ease of reference

Tools required: #2 square tip screwdriver, 9/16th inch ratchet and a mallet.

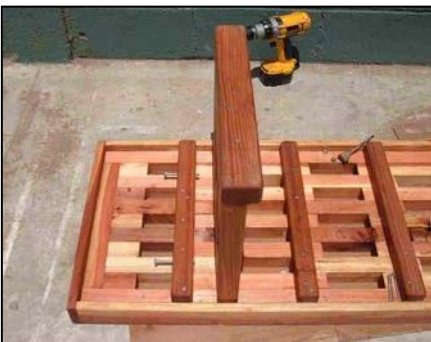

1 Attach legs to bench seat. With the bench seat upside down, you will see that the boards nearest the bench edge have two pre-drilled holes. Line up these holes with the holes on the top of the bench legs.

The legs are not interchangeable from side to side. The legs and the bench seat boards are marked with matching numbers. Match up the numbers to each corresponding side. Align the predrilled holes, tap the bolt all the way in to set it into the wood and then add a washer and tighten the nut. Make sure you are attaching the correct side – if the bolts do not line up, just move the leg over to the other side of the bench seat. The bolts should tap into their hole. If you are using force, the leg probably belongs on the other end of the bench seat. Do not over tighten the bolts or you'll crush through the redwood and weaken the bench.

Repeat this step with the other leg.



2 Once you have the two legs attached, attach the cross support to the leg and underside of bench seat with the stainless steel screws supplied. The holes have already been drilled. Use a #2 square bit to screw the stainless steel 2 ½ inch screws into the four pre-drilled holes (if you don't have a no. 2 square bit, you can pick one up at any hardware store for \$1).

Repeat this step with the other side.

Thank you. If you have any questions, please call or email us.