
866.332.2403; Outside the US: 619.600.5630 7am-7pm Pacific Time, Monday-Saturday




Assembly Instructions for: **ROUND PICNIC BENCHES**



Thank you for purchasing Forever Redwood patio furniture. Forever Redwood is built by Old-Growth Again Restoration Forestry (OGA). OGA is dedicated to restoration forestry. Sales of patio furniture finance our restoration work in California redwood forestlands.


Tools required: ½-inch ratchet and a mallet or small hammer.

Content of boxes:

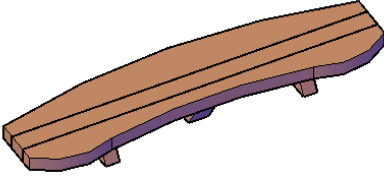Quantity	Description	Drawing
2	Legs	
1	Bench Top	
2	Diagonal Supports	
6 to 8 (Depend of bench length)	Carriage Bolts 5/16 x 3 ½", Washers and Nuts	
1	Carriage Bolt 5/16 x 4 ½", Washers and Nuts (If apply)	
4	Deck Screws (If apply)	


The parts that go together have the same numbers written next to the predrilled holes they attach to. Align the parts with the numbers as shown for ease of reference

Step 1: Attach leg to bench top with 2 bolts (5/16 x 3 ½"), washers and nuts. Bench top upside down, you will see that the boards under the top about six inches from the narrow side edges have two pre-drilled holes. Line up these holes with the holes on the top of the bench legs. The legs are not interchangeable from side to side the legs and the bench top boards are marked with matching numbers. Tap the bolts in, add a washer and tighten the nut. Repeat this step to attach the other leg

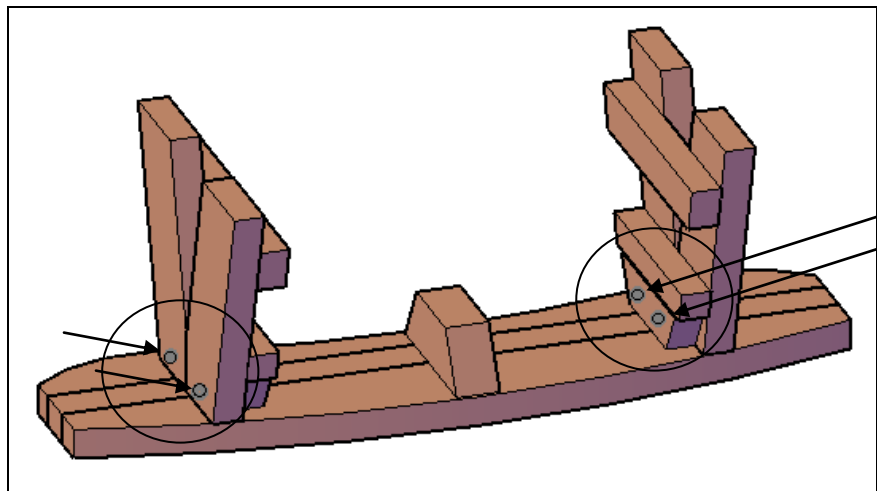


Step 2: Attach diagonal supports to legs and bench top. There are 3 cases to attach the diagonal supports and it will depend of your bench length. Match the numbers written next to the predrilled holes. If a hole is 5/16" then you must attach that part with a carriage bolt. For small benches you will notice that holes are tiny and you must attach the diagonal supports with deck screws provided for us.

Case 1: For large benches

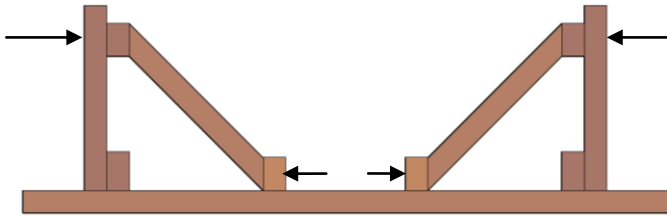


Larger Benches – 2 bolts to attach each diagonal Support

Case 2: For small benches

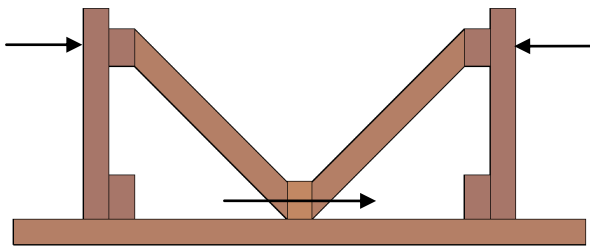

Small Benches – 1 bolt to attach each diagonal support to legs and 1 bolt (4 1/2" x 5/16) to attach both diagonal supports to bench top

Case 3: For tiny benches

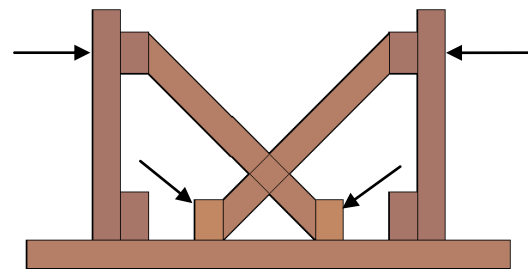

Tiny Benches – Could be 32" or less. 2 deck screws to attach each diagonal support to bench top and one carriage bolt to attach each diagonal support to each leg

Step 3: Turn the bench over. You are done!



Thank you. If you have any questions, please call or email us.