

866.332.2403 (TOLL FREE); 7am – 7pm Pacific Time, Monday-Saturday

ASSEMBLY INSTRUCTIONS FOR THE BENCH SWING SETS



	No.	1	7	3	4	5	9	7
CONTENT OF BOXES - Frame Swing	Drawing							
	Description	Posts	Legs	Supports	Diagonal Supports	Roof Supports If ordered	Roof Panel If ordered	Roof Board If ordered
	Qty.	2	7	1	4	2	7	1

Note: Part numbers in the Content of Boxes Table are for reference only. These do not match to the numbers marked on the parts sent.


	No.	∞	6	10
CONTENT OF BOXES – Bench Swing	Drawing			
	Description	Armrest	Seat	Backrest
	Qty.	2	1	1

Note: Part numbers in the Content of Boxes Table are for reference only. These do not match to the numbers marked on the parts sent.

	HARDWARE LIST	
Description	Drawing	No.
$3/8^{\prime\prime}$ x 7 $^{\prime\prime}$ Bolts (To attach the posts to the legs).		А
3/8" x 8" Bolts (To attach the diagonals supports to the posts and to the support. / To attach the XL roof to the support).		В
5/16" x 3 ½" Bolts (To attach the support to the pos.65ts. / To attach the seat and the backrest to the armrest).		C
$5/16^{\prime\prime} \times 5^{1/2}$ Bolts (To attach the roof supports to the posts).		D
$5/16^{\prime\prime} \times 4^{\prime\prime}$ Bolts (To attach the roof panels to the roof supports).		闰
3" Deck Screw (To attach the roof panels to the di3agonal supports).		Н
2 1/2" Deck Screw (To attach the roof board).		Ð
$4^{\prime\prime}$ x 3/8 $^{\prime\prime}$ Eyebolts (To attach the backrest to the armrest).		Н
Quick Links		Ι
Springs		J
Chains		Ж

Note: Dimensions of your hardware will vary depending on size.


DESCRIPTION	No
Posts	1
regs	2
Supports	3
Diagonal Supports	4
Roof Supports	5
Roof Panel	9
Roof Board	7
Armrest	8
Seat	6
Backrest	10

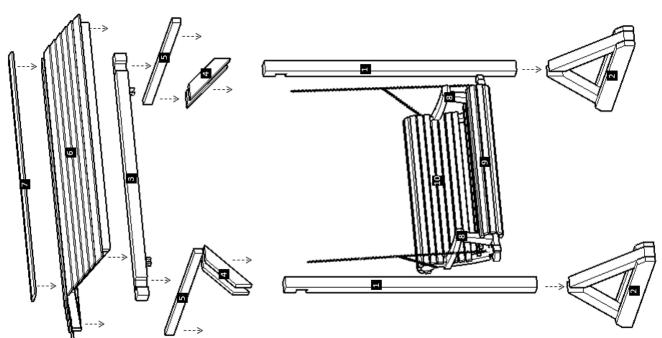


Note: Part numbers in the <u>Drawing</u> are for reference only. These do not match to the numbers marked on the parts sent.

Option A - Without Roof


Step 1: Attach the post (1) to the legs (2) with 3/8" x 7" bolts (A) and 3/8" x 8" bolts (B). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

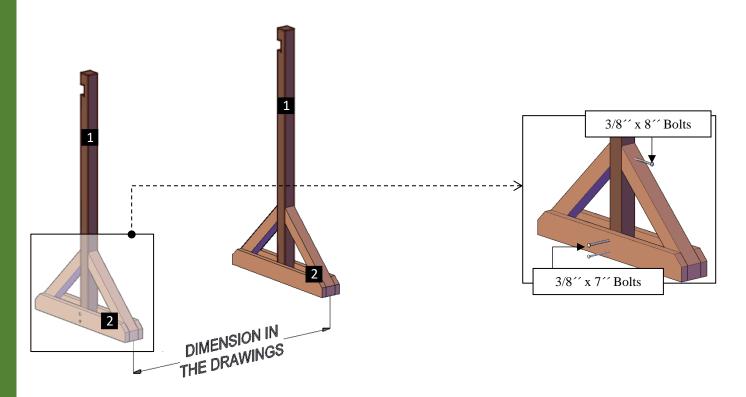


Step 2: Put the Quick Links (I) and the Springs (J) in the hanger's support. After that, put the chains (K). Take a few minutes to adjust the chain height to your preference.

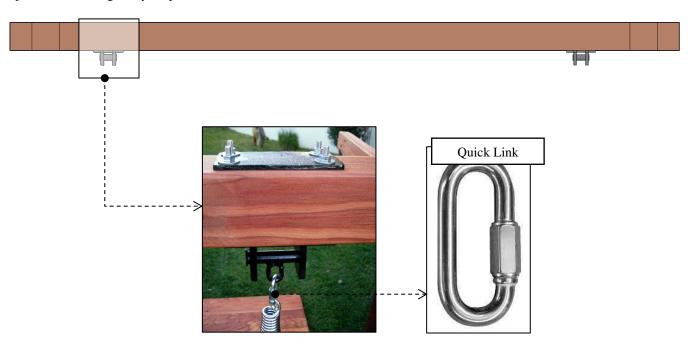

Step 3: Use 5/16 'x $3\frac{1}{2}$ 'bolts (C) to attach the support (3) to the posts. Each part has a series of numbers that indicate where to attach the part with the corresponding number.

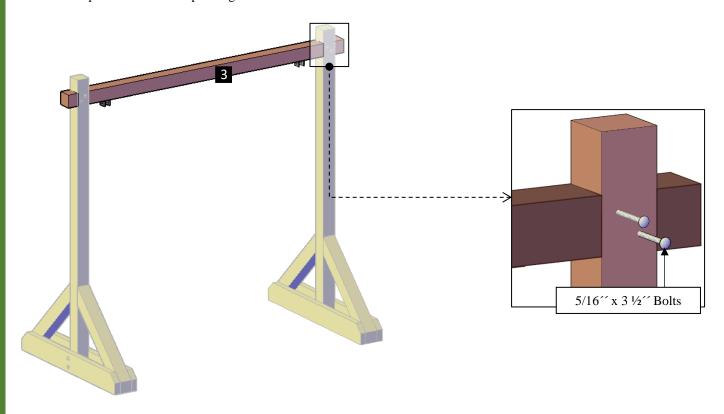


Step 4: Attach the diagonal supports (4) to the posts and to the support with 3/8" x 7" bolts (A). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

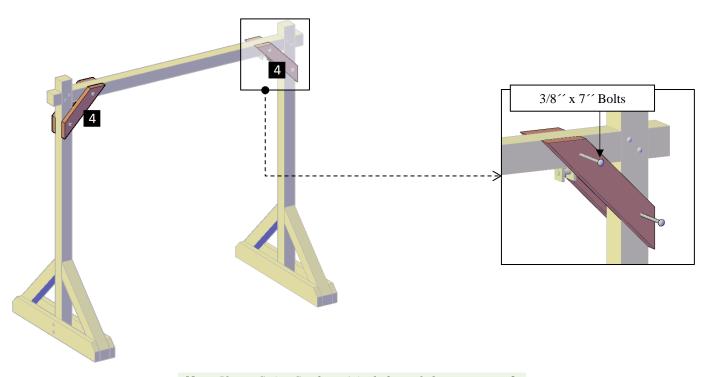


Note: If your Swing Set doesn't include roof, then go to step 9.

Option B - With Roof


Step 5: Attach the roof supports (5) to the posts with 5/16" x 5 $\frac{1}{2}$ " bolts (**D**). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

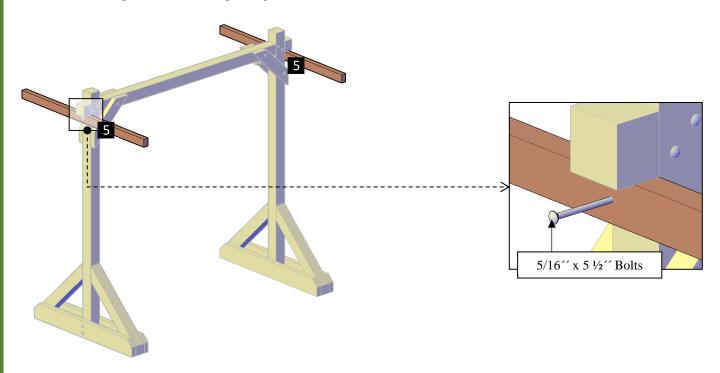


Step 6: Attach the roof panels (6) to the roof supports with 5/16 x 4 bolts (E) and to the diagonal supports with 3 deck screws (F). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

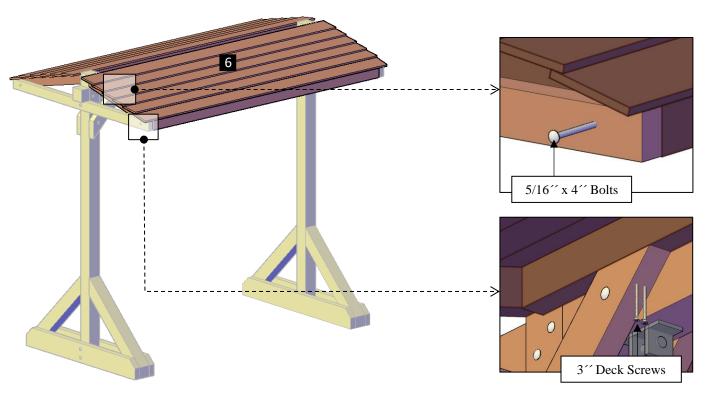


Step 7: Attach the roof panels **(6)** to the roof supports with 3/8" x 8" bolts **(B).** Each part has a series of numbers that indicate where to attach the part with the corresponding number.

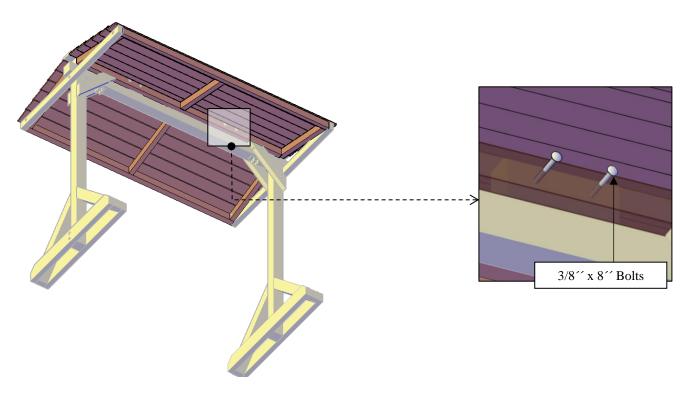


Step 8: Use 2 ½" deck screws (**G**) to attach the roof board (**7**) to the posts. Each part has a series of numbers that indicate where to attach the part with the corresponding number.

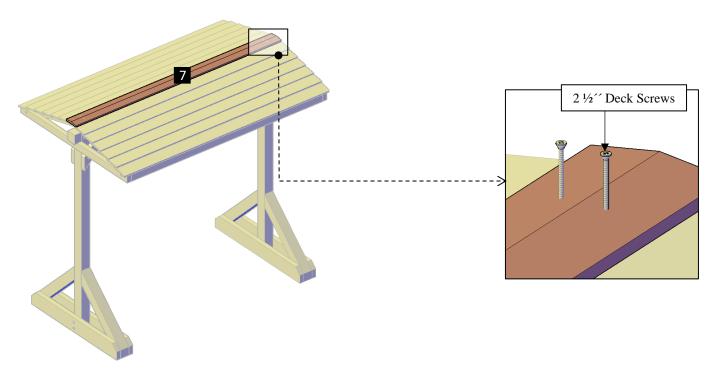

Step 9: Attach the seat (9) to the armrests (8) with $5/16^{\prime\prime}$ x $3\frac{1}{2}^{\prime\prime}$ bolts (A). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

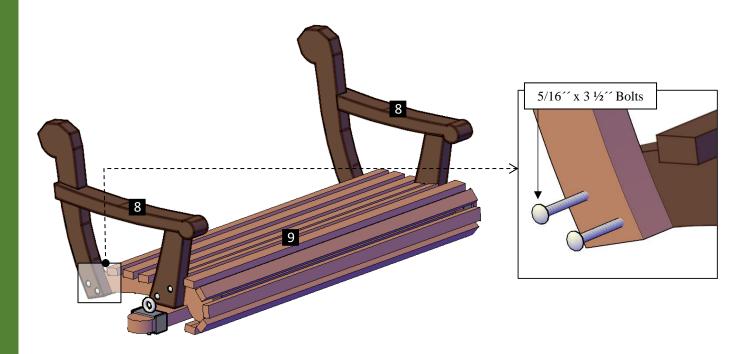

Step 10: Attach the backrest (**10**) to the armrests with $5/16^{\prime\prime}$ x $3\frac{1}{2}^{\prime\prime}$ bolts (**A**) and $4^{\prime\prime}$ x $3/8^{\prime\prime}$ eyebolts (**I**). Each part has a series of numbers that indicate where to attach the part with the corresponding number.

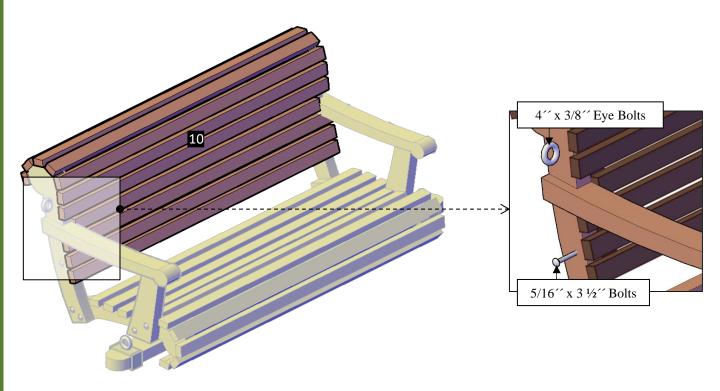

Step 11: Finally, use quick links (I) to join the bench swing to the chains (K).



Option A – Without Swing Roof



Option B – With Swing Roof





This completes the Swing assembly. Hope you enjoy your set for many decades. If you ever have a problem or a question, don't hesitate to call us (866 332 2403) or email us. We are here to support you.