


866.332.2403 (Toll Free); 7am-7pm Pacific Time, Monday-Saturday


Assembly instructions for: **COCKTAIL BAR STOOLS**



Cocktail Bar Stools


Quantity	<u>Description</u>	Drawing
14	Carriage bolts 3 ½" x 5/16", Washers	
	& Nuts	
2	Carriage bolts 4 ½" x 5/16", Washers	
	& Nuts	
1	Seat (A)	A
1	Backrest (B)	B

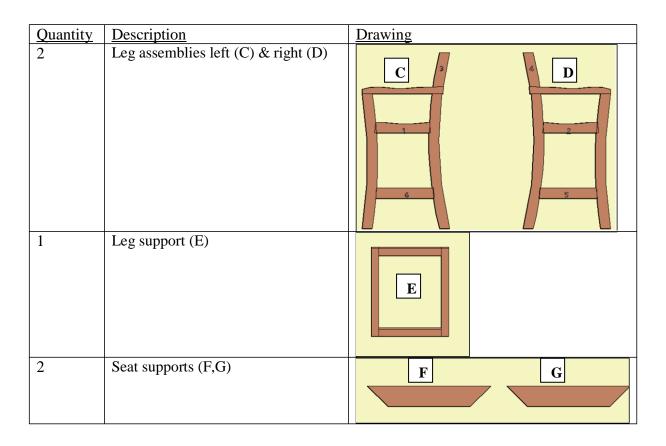


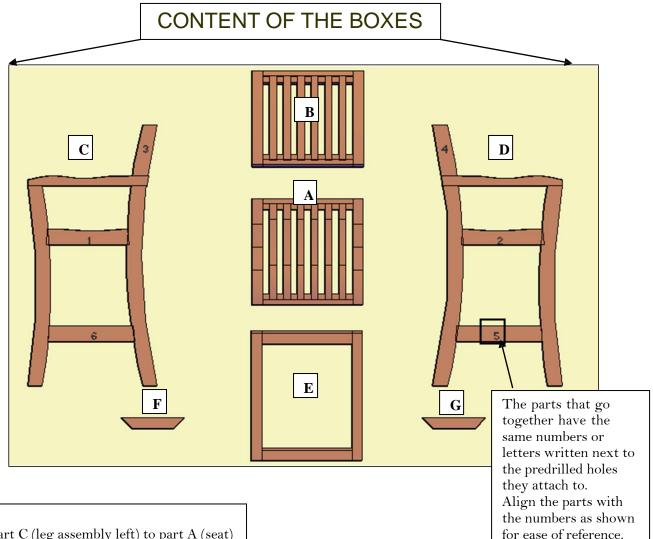

STEP 1:

Attach part C (leg assembly left) to part A (seat) with two bolts 3 ½"x 5/16", washers & nuts. (Hole number one into hole number one). Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.






STEP 2:

Attach part C (leg assembly right) to part A (seat) with two bolts 3 ½"x 5/16", washers & nuts. (Hole number two into hole number two). Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.


Cocktail Bar Stools

www.foreverredwood.com



STEP 3:

Attach part C (leg assembly left) to part B (backrest) with two bolts 3 ½"x 5/16", washers & nuts (hole number three into hole number three). Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.



STEP 4:


Attach part D (leg assembly right) to part B (backrest) with two bolts 3 ½"x 5/16", washers & nuts (hole number four into hole number four). Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.


STEP 5:

Attach part C (leg assembly right) to part E (leg support) with two bolts 3 ½"x 5/16", washers & nuts. (Hole number five into hole number five). Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.

STEP 6:


Attach part C (leg assembly left) to part E (leg support) with two bolts 3 ½"x 5/16", washers & nuts (hole number six into hole number six). Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.






Cocktail Bar Stools


www.foreverredwood.com





STEP 7:

Attach part F (leg supports) to parts C (leg assembly left) & A (seat) with two bolts, washers & nuts (hole 7 & X into hole 7 & X. Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.



STEP 8:

Attach part G (leg supports) to parts D (leg assembly right) A (seat) with two bolts, washers & nuts (hole 8 & X into hole 8 & X. Tap the bolt all the way into the wood to set it. Then add a washer and nut and lightly tighten.