







866.332.2403 (Toll Free); 8am-5pm Pacific Time, Monday-Friday

## Assembly Instructions for: **ENSENADA WOODEN EASY CHAIRS**



## CONTENT OF BOXES

QUANTITY	DESCRIPTION	DRAWING
1	Seat	
1	Backrest	
2	Armrest	
1	Bottom Support	
8	Carriage bolts 3 1/2" x 5/16", Washers and Nuts	Bolts, washers and nuts 
4	Carriage bolts 3" x 5/16", Washers and Nuts	Bolts, washers and nuts 

## ASSEMBLY INSTRUCTIONS


Thank you for purchasing Forever Redwood patio furniture. Forever Redwood is built by Old Growth Again Restoration Forestry (OGA). OGA is dedicated to restoration forestry. Sales of patio furniture finance our restoration work in California redwood forestlands. Tools required: ½-inch ratchet and a mallet or small hammer.

Unpack your chair and make sure you have all the parts. The parts that go together have the same numbers written next to the predrilled holes they attach to. Align the parts with the numbers as shown for ease of reference.


**Step 1:** Place the seat on the ground and notice that each side has a number that corresponds to each armrest. Match the backrest number to the seat side hole and attach with four carriage bolts as shown below. Align the predrilled holes; lightly tap the two bolts in (3 ½" x 5/16"). The bolts should tap into their holes. If you have to force a bolt, the leg is probably not oriented properly, is in the wrong hole or it is turned around. Make sure the bolts are tapped all the way into the wood, then add washers and nuts and tighten with a ½-inch ratchet. Do not over tighten or you'll crush the redwood and weaken the chair structure. *Repeat this step to attach the other side.*



**Step 2:** Attach the armrest to seat and backrest with 3 bolts washer and nuts per side. Match the numbers next to the predrilled holes on the backrest to the numbers on the chair side. Tap the carriage bolts all the way into the wood, then attach the washers, nuts and tighten with ½-inch ratchet. Do not over-tighten. *Repeat this step to attach the other side.*

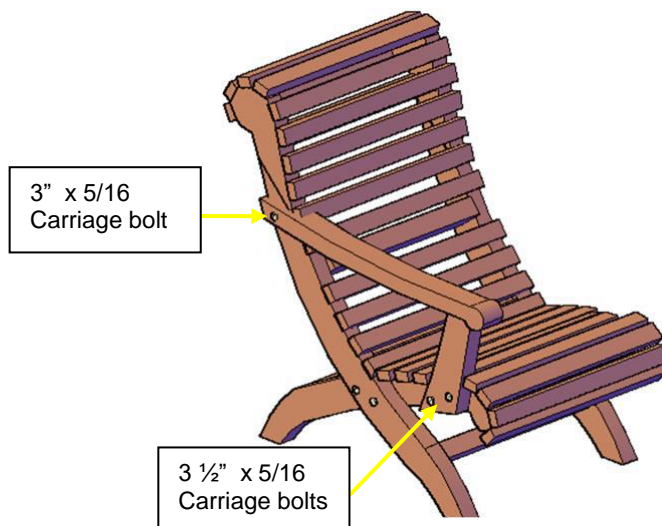

**Step 3:** Attach bottom support to bottom seat and backrest with two carriage bolts (3" x 5/16), washers and nuts.

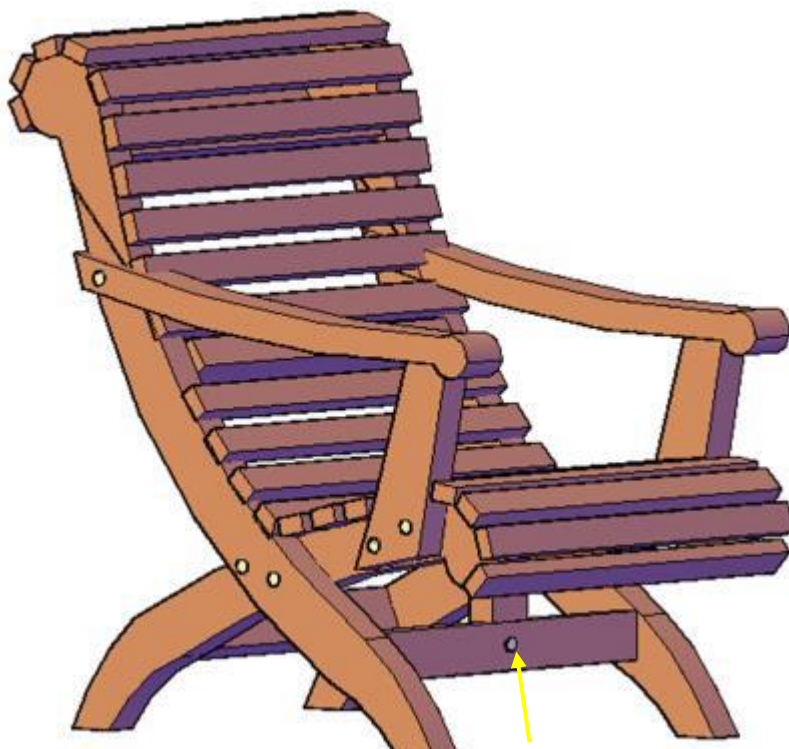

Thank you. If you have any questions, please call or email us.