

---

866.332.2403 (Toll Free); 7am-7pm Pacific Time, Monday-Saturday




## Assembly instructions for: **THE MIRAMAR TREE BENCHES**



Thank you for purchasing Forever Redwood patio furniture. Forever Redwood is built by Old-Growth Again Restoration Forestry (OGA). OGA is dedicated to restoration forestry. Sales of patio furniture finance our restoration work in California redwood forestlands.


**Tools required:** ½-inch ratchet and a mallet or small hammer.

**Box Content:**


Quantity	Description	Drawings
Quantity depends of size	Seat Tops	
Quantity depends of size	Legs	
Quantity depends of size	Diagonal Bracers	
Quantity depends of size	Carriage Bolts, washers and nuts	
Quantity depends of size	Deck Screws	

Your furniture was fully assembled in the shop prior to being dismantled for shipping. All the parts fit. The parts that go together have the same numbers written next to the predrilled holes they attach to. Please take the time to align the parts with the numbers. If you are forcing a bolt in, the part may be turned around or not aligned properly. Tap the bolt all the way into the wood to set it, then add a washer and lightly tighten. Don't over tighten or you will crush the redwood.



**Step 1:** Unpack your Tree Bench and make sure you have all the parts. You'll notice that each Seat Top has a number in both ends that corresponds to each leg.

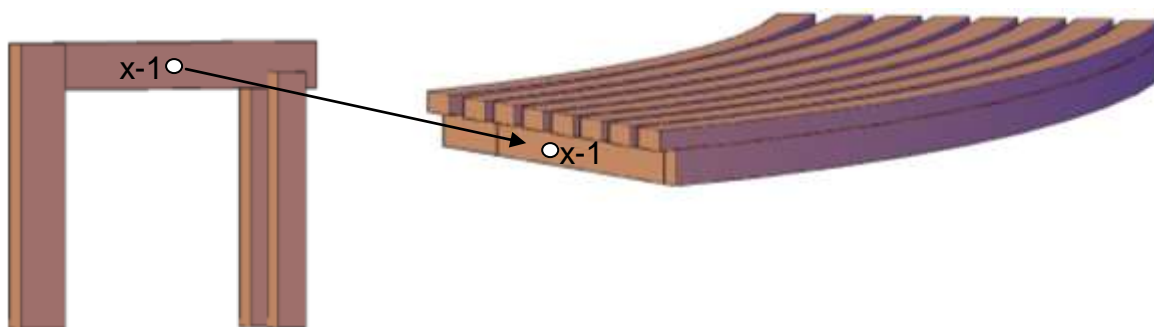


**Step 2:** Match the leg number to the Seat Top hole and attach with two carriage bolts. Align the predrilled holes, lightly tap the 2 bolts in. The bolts should tap into their holes. If you have to force a bolt, the leg is probably not oriented properly, is in the wrong hole or it is turned around. Make sure the bolts are tapped all the way into the wood, then add washers and nuts and tighten with a ½-inch ratchet. Do not over tighten or you'll crush the redwood and weaken the table's structure.

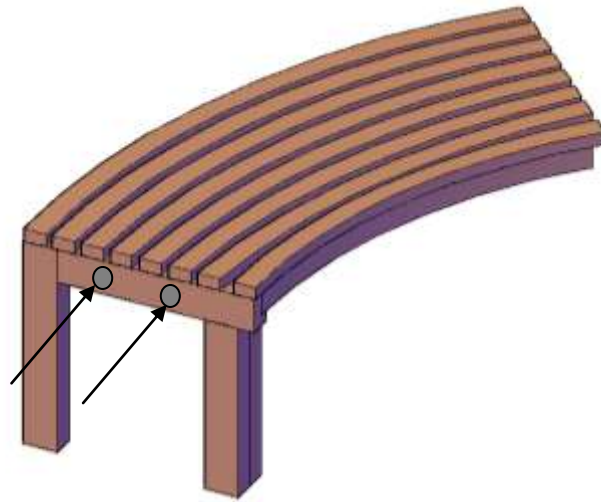

**Step 2:** Repeat step 2 for the other legs.

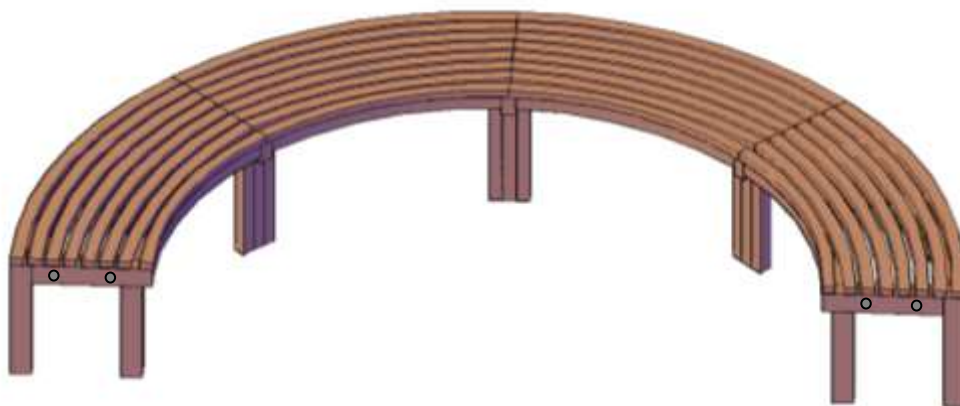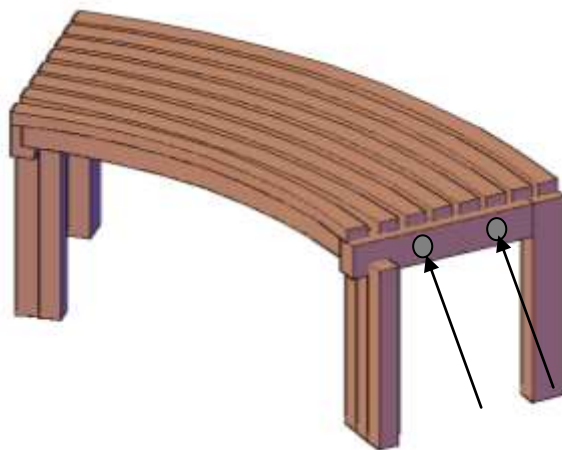

**Step 3:** Attach diagonal supports to seat top and leg with 2 screws as shown below. Make sure the diagonal support numbers match with seat top and leg:

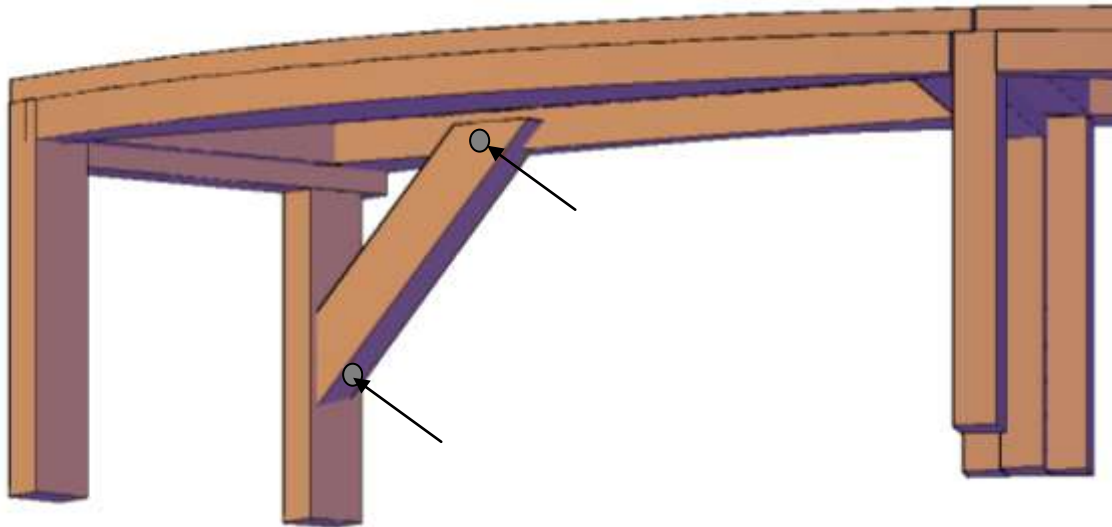

**Step 4:** Repeat step 3 for all the diagonal supports



Thank you! If you have any questions, please call or email us.